

TROMBETTA'S HIGH FORCE D500 SOLENOIDS OFFER LONGER STROKES AND AN INTEGRAL SWITCH

D500 Features

Trombetta's D500 Series was designed for heavy duty diesel engines and industrial applications in harsh environments.

- Higher force and longer strokes than competitive solenoids.
- Dual coil construction for high pull force.
- Heavy duty, integral switch.
- Continuous duty operation
- Can be application engineered to your order

D500 Applications

Trombetta's D500 Series handles all but the most unusual diesel engine applications for fuel shut-off, throttle control, dampers, ether injection, and other critical control situations.

Determining solenoid performance:

Trombetta has extensively tested the D500 series solenoid for electromechanical & temperature performance. The data shown should be considered as **Typical**. Please use this information as a selection guide and consult Trombetta with details about your application.


Basic operation of a D500 solenoid:

This type of solenoid uses a coil having two sections: a high power, pulse duty, **Pull** winding, and a low power, continuous duty **Hold** winding. When the solenoid is energized, and the plunger is extended, a built-in switch on the end of the unit is closed, connecting both sections of the coil to the input terminals. During the time it takes for the plunger to pull in, the pulse duty power is drawn. Once the plunger seats, it opens up the internal switch, and then only continuous duty power is drawn. Caution should be taken when installing this type of solenoid... damage to the solenoid may occur if the plunger does not fully seat.

The force a solenoid can produce depends on several conditions:

1. **Stroke.** The force depends on the distance of the plunger from the fully energized position. The fully energized position equals 0" stroke, or plunger seated.
2. **Voltage.** As the voltage measured at the solenoid increases, so does the force. Keep in mind, when the pull section of the coil is being energized, a significant voltage drop can occur in the wiring to the solenoid.
3. **Temperature.** When the solenoid's coil temperature rises, the amount of force decreases. Two things determine the coil temperature: a) **The net ambient temperature.** In most cases, use the air temperature as the ambient. The net ambient is the combined effect of the air around the solenoid, and heat conducted via the solenoid's mounting plate. b) **The average power input to the coil.** In most cases, consider the hold section of the coil to be on continuously. The hold section power depends on the voltage applied. The pull-in heating can be ignored, unless frequently cycled.

Trombetta D500 SERIES Solenoids

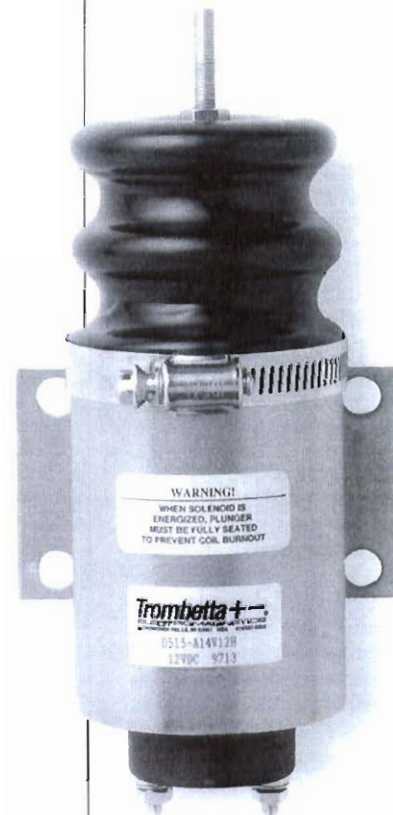

Trombetta solenoid products have been designed and manufactured in the U.S.A. since 1932.

See Trombetta first for long-lasting tough-duty solenoids to fit the toughest – or easiest – applications.

Trombetta 
ELECTROMAGNETICS

13901 Main Street
Menomonee Falls, WI 53051
(414) 251-5454
FAX: (414) 251-5757
<http://www.trombetta.com>

Trombetta D513 SERIES Solenoids

Determining the solenoid's force for a given set of conditions:

Charts A & B apply to all of the D500 series solenoids. Each size D500 has its own Charts C & D.


- **Step 1. Find the final coil temperature using Chart A:** Find the line representing your % of rated voltage applied to the hold section. Locate your ambient temperature on the x-axis. Read the final coil temperature on the y-axis. 120% of rated voltage might be typical, in the case of an engine application, where the electrical system is charging, and the solenoid is energized.
- **Step 2. Determine the K factor using Chart B:** The *K factor* is a value which represents the combined effect of voltage and coil temperature. The *K factor* = 1.0 when you have 100% rated voltage and a 25°C coil temperature. Locate the final coil temperature you found in Step 1 on the x-axis. Select the % of rated voltage curve you wish to use when finding the forces in Step 3 or 4. Read the *K factor* on the y-axis. Note: the % of rated voltage used here does not have to be the same as used in Step 1. For example, 120% might be used in figuring the heating in the hold condition, but only 80% may be available for pull-in, due to voltage drop in the wiring, etc.
- **Step 3. Find the pull force using Chart C:** Locate the stroke of the solenoid on the x-axis. Use the curve for the *K factor* found in Step 2. The pounds pull force can then be read on the y-axis.
- **Step 4. Find the hold force using Chart D:** Locate the *K factor* you found in Step 2 on the x-axis. Read the pounds hold force on the y-axis.

D513 Series Part Numbers





Catalog Number	Rated Voltage	Return Spring
D513-A33V12	12	NONE
D513-A33V24	24	NONE
D513-B33V12	12	LIGHT
D513-B33V24	24	LIGHT
D513-C33V12	12	MEDIUM
D513-C33V24	24	MEDIUM
D513-D33V12	12	HEAVY
D513-D33V24	24	HEAVY

- All units have 1/4-28 external pull rods.
- Additional models are available

D513 Solenoid Series... all dimensions in inches (and millimeters)

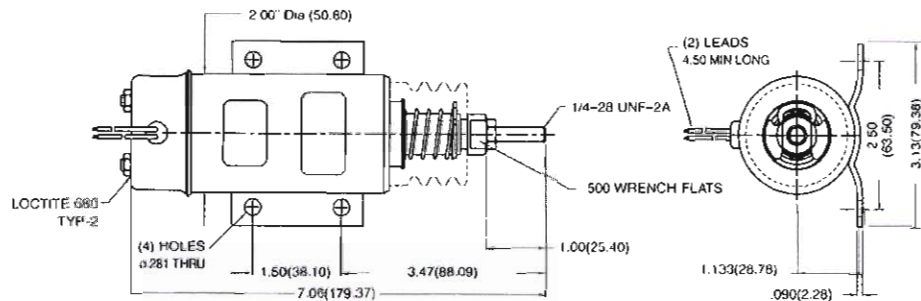


SOLENOID SHOWN ENERGIZED

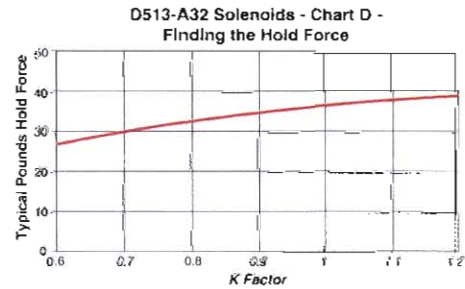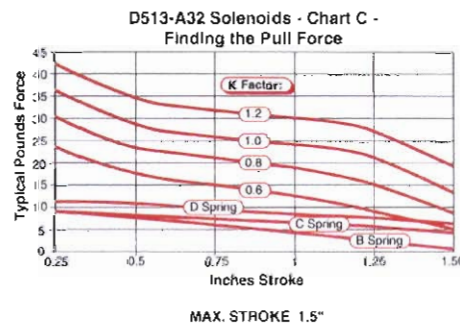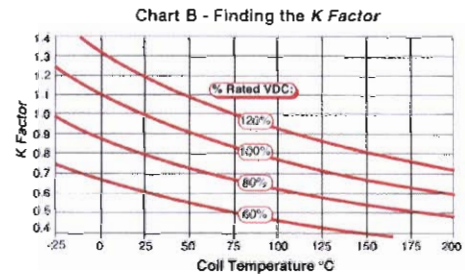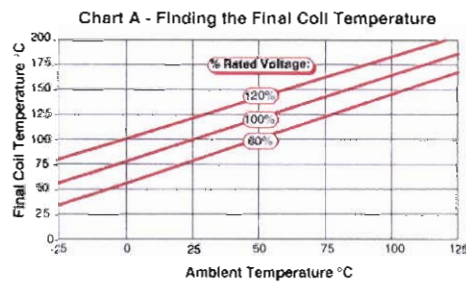

D513 General Specifications at 100% Rated Voltage & 25°C






	WATTS	AMPS (12V UNIT)	AMPS (24V UNIT)	POUNDS FORCE	NEWTONS FORCE
PULL-IN @ 1.5"	840	68	36	13.9	62
HOLD	11	0.9	0.4	37	164
SHIPPING WEIGHT: 2.6 POUNDS					

D515 Solenoid Series... all dimensions in inches (and millimeters)

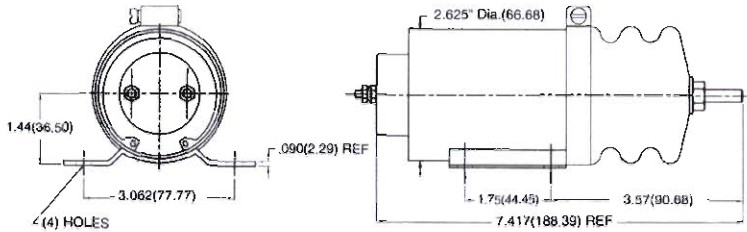

SOLENOID SHOWN DE-ENERGIZED

Trombetta D515 SERIES Solenoids

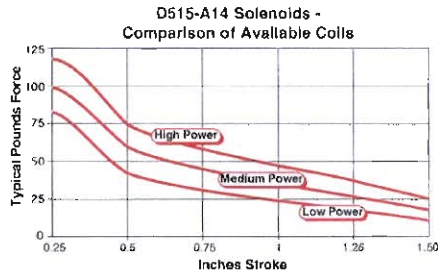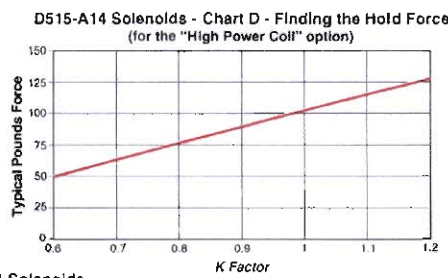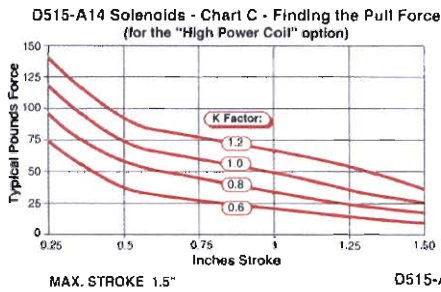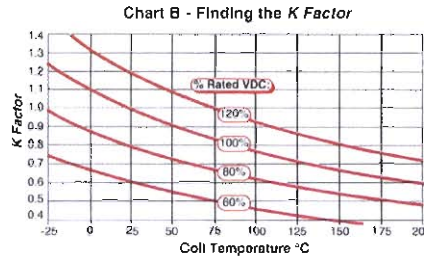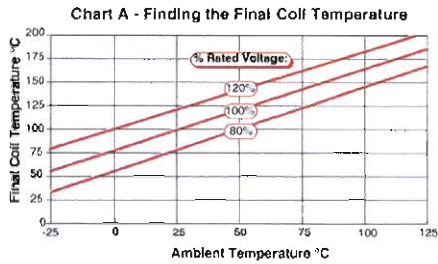

D515 General Specifications at 100% Rated Voltage & 25°C

		12 VOLT MODELS			24 VOLT MODELS			36 VOLT MODELS		
CATALOG NUMBER		Low Power D515-A14	Medium Power D515-A14V12M	High Power D515-A14V12H	Low Power D515-A14	Medium Power D515-A14V24M	High Power D515-A14V24H	Low Power D515-A14	Medium Power D515-A14	High Power D515-A14
PULL-IN @ 1.5"	AMPS	40	56	83	26	36	40	15	21	28
	WATTS	478	667	993	632	868	948	538	743	1021
	POUNDS FORCE	12	18	28	19	26	28	17	24	26
	NEWTONS FORCE	55	82	124	82	117	122	77	108	117
HOLD	AMPS	0.6	1.0	1.9	0.6	0.6	1.0	0.5	0.6	0.4
	WATTS	7	12	23	14	13	25	18	21	16
	POUNDS FORCE	61	82	108	81	78	106	99	97	102
	NEWTONS FORCE	270	365	480	362	349	469	439	430	454


SHIPPING WEIGHT: 4.5 POUNDS

D515 Series Part Numbers





Catalog Number	Rated Voltage
D515-A14V12	12
D515-A14V12M	12
D515-A14V12H	12
D515-A14V24	24
D515-A14V24M	24
D515-A14V24H	24
D515-A14V36	36
D515-A14V36M	36
D515-A14V36H	36

- All units have 1/4-28 external pull rods.
- Additional models are available

D516 Solenoid Series... all dimensions in inches (and millimeters)

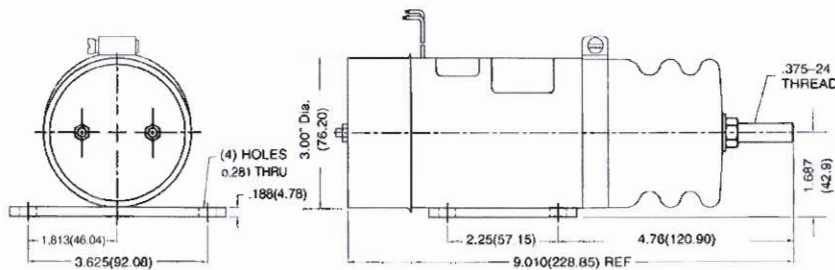

SOLENOID SHOWN DE-ENERGIZED

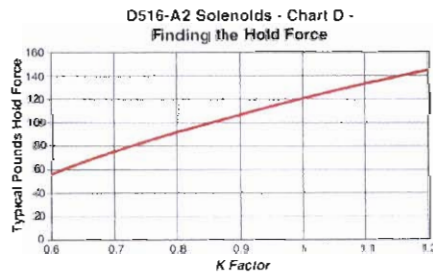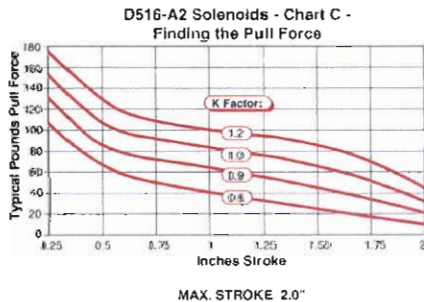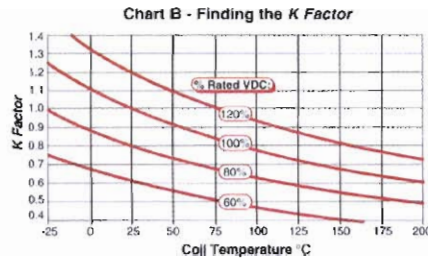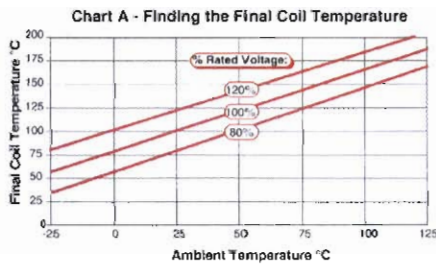

D516 General Specifications at 100% Rated Voltage & 25°C

	WATTS	AMPS (12V UNIT)	AMPS (24V UNIT)	POUNDS FORCE	NEWTONS FORCE
PULL-IN @ 2"	1050	.85	.45	31	138
HOLD	27	2.5	1.0	121	538
SHIPPING WEIGHT: 7.2 POUNDS					

No implied warranty is intended. All information is subject to change without notice. Contact factory for complete installation and wiring instructions.

Trombetta D516 SERIES Solenoids



D516-A2 Series Part Numbers

Catalog Number	Rated Voltage
D516-A2	12
D516-A2	24

• Additional models are available

D500 Series Options

- Custom return springs
- Electrical connectors
- Additional voltages
- Custom designs available

Trombetta solenoid products have been designed and manufactured in the U.S.A. since 1932.

See Trombetta first for long-lasting tough-duty solenoids to fit the toughest – or easiest – applications.

Trombetta **+**
ELECTROMAGNETICS

13901 Main Street
Menomonee Falls, WI 53051
(414) 251-5454
FAX: (414) 251-5757
<http://www.trombetta.com>