


# Reversing Polarity

**Trombetta's Reversing Polarity (RP) DC Contactors provide a cost effective and simple solution for reversing polarity of permanent magnet DC motors. By integrating two DC Contactors into a single unit, Trombetta has streamlined the assembly.**

**The result is less assembly time, less potential for problems and more reliable performance. The RP can also be customized to specific motors and load requirements.**

**The RP is perfect for any application that requires reversing motion:  
Truckwinch, tarp systems,  
boatlifts, RV slide-outs and  
RV leveling systems.**

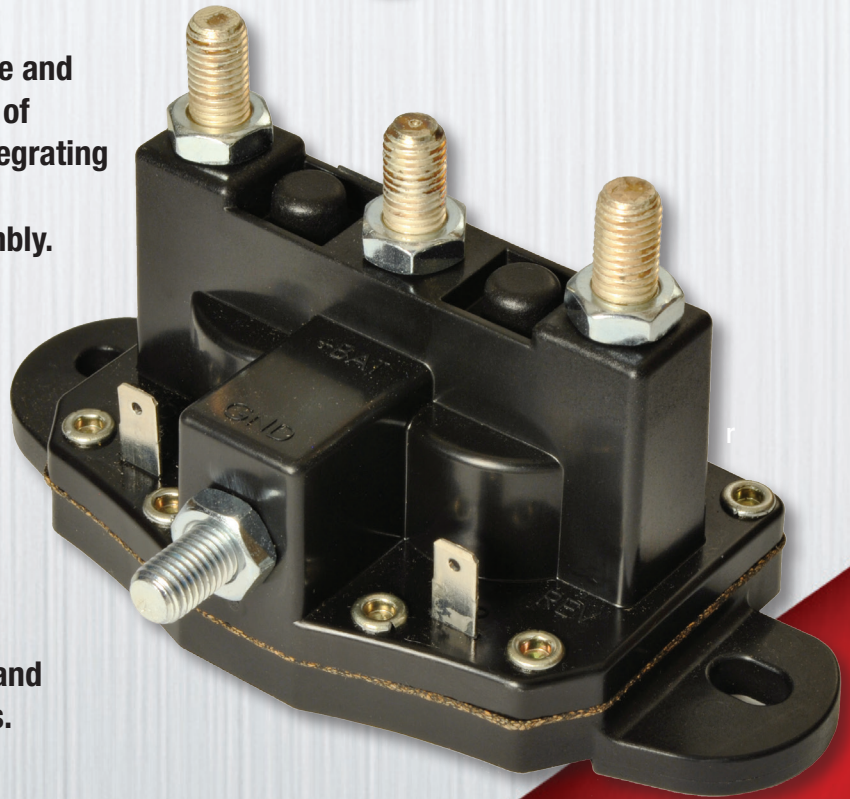

**TROMBETTA**   
DC Power Solutions for a Harsh World

414-410-0300 • [trombetta.com](http://trombetta.com)

## Reversing Polarity DC Contactor Specifications

Coil Terminals

(2) Low Current Terminals (1/4" spade)  
 (4) 5/16-24 Studs - High Current Terminals,  
 2 for motor and 2 for battery  
 Standard Operating Temperature Range  
 -40° C to 50° C  
 Relay is dust and splash resistant.


### Coils

### Contact

Model	Max Sustained Duty Cycle <sup>1*</sup>	Max On Time <sup>†</sup>	Pull In Voltage <sup>2</sup>	Hold Voltage <sup>2</sup>	Coil Resist Ohms	Resistive Load Carry/Interrupt Capability (Amps) <sup>3</sup>	Inductive Load Carry/Interrupt Capability (Amps) <sup>3</sup>	Peak Inductive Inrush Capability (Amps) <sup>4</sup>	Electrical Cycle Life	Contact Material
12V Standard	16%	2 minutes	7.5	2.5	5.6	75 for 2 min. (125 for 30 sec.) 150 amps	75 for 2 min. (125 for 30 sec.) 150 amps	150	10,000	Copper
12V Enhanced	16%	2 minutes	7.5	2.5	5.6	75 for 2 min. (125 for 30 sec.) 150 amps	75 for 2 min. (125 for 30 sec.) 150 amps	350	5,000	Copper and Silver Alloy Plating
12V High Perf.	16%	2 minutes	8.0	2.5	5.6	75 for 2 min. (140 for 30 sec.) 250 amps	75 for 2 min. (140 for 30 sec.) 250 amps	500	5,000	Copper with Silver Alloy Plating
24V Enhanced	16%	2 minutes	15	5.0	25.5	75 for 2 min. (125 for 30 sec.) 180 amps	75 for 2 min. (125 for 30 sec.) 180 amps	150	10,000	Copper and Silver Alloy Plating

<sup>1</sup>Nominal coil voltage applied starting from 25° C DC Contactor temperature. Duty Cycle=On Time/(On Time + Off Time). <sup>2</sup>Voltages listed are minimum required at 25° C coil temperature. Minimum voltage requirements will increase with coil temperature. <sup>3</sup>Amps at Max Duty Cycle. <sup>4</sup>Risetime ≥ 3 milliseconds to 80% of peak inrush with linear decay to run (carry) current in ≤.1 seconds.

### TYPICAL DIMENSIONS

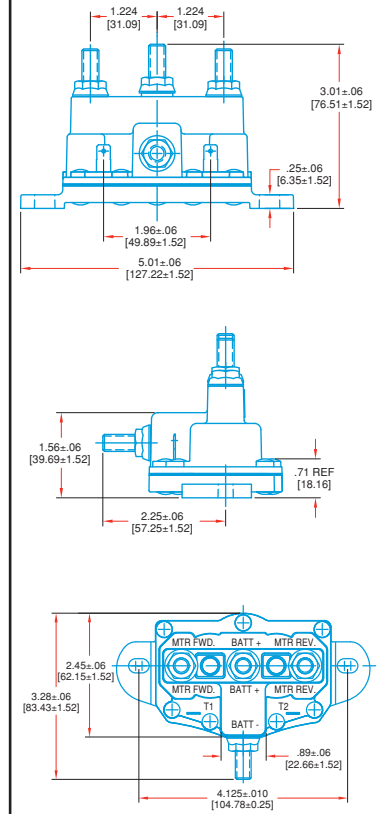

Enter Complete Part Number Below –

Ordering Information • Some configurations are not available. Contact your Trombetta sales rep before ordering.

Family	Coil Connection Configuration	High Current Stud	Coil Voltage	Bracket Type	Bracket Location	Duty Cycle	Contact Material	Sealing
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
2- Reversing Polarity (RP)	1- Grounded Coils (2) each with (1) 1/4" Spade and a common 5/16-24 Central Ground	4- Standard R.P.	12- 12 Volt 24- 24 Volt	1- Hose Clamp Mount Bracket 3- Molded	1- Standard Location	A- 20% Sustained	1- Copper 5- Alloy Silver Contact Bars 6- Alloy Silver Contacts & Contact Bars	1- Resistant to dust, liquid

\*Additional Max On Times and Duty Cycle Combinations:

Max On Time	Duty Cycle Max
60 seconds	35%
90 seconds	25%
120 seconds	16%
150 seconds	5%

†Trombetta has the ability to test for customer's specific conditions.

